

Order no.: 036424

Double-sided rung ladder GFRP



Number of rungs

- 2x4
- 2x4
- 2x5
- 2x10
- 2x12
- 2x14



Specification

Working height 2.9 m	Step design Sprossen	Number of steps/rungs 2x 4 rungs	Step/Rung height 28 mm	Step depth 28 mm
Step/Rung distance 280 mm	Height 1.19 m	Ladder length 1.23 m	Inclination 70 °	Lower outer width 479 mm
Depth of side-rails 58 mm	Width of side-rails 25 mm	Max. load capacity 150 kg	Design type Freistehend Beidseitig begehbar	Transport dimensions (plus packaging) 1273 x 479 x 58 mm, 6.9 kg
Business division MUNK Günzburger Steigtechnik	Order no. 036424			

Facts


- Double-sided rung ladder made of glass-fibre reinforced plastic
- Side-rails and rungs made of reinforced fibre glass plastic profiles
- High-strength rung-to-side-rail connection
- Plastic end caps on upper side-rail end

- Spreader lock with two high-strength polyester straps
- Rung distance: 280 mm
- Maximum load: 150 kg
- Suitable for working near or on live parts
- Note: Products with GFRP content are non-returnable, due to their sensitivity; the statutory warranty applies (ageing resistance 10 years)

Scope of supply

- Ladder: 1 x

More product pictures

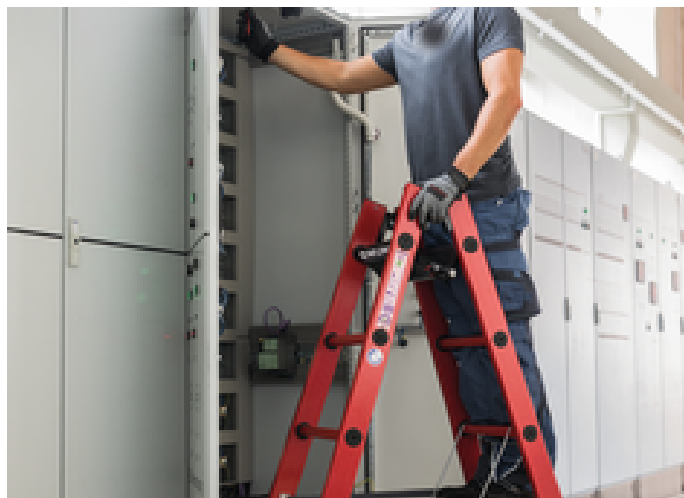

Added value

Industrial grade

Stable and robust for tough everyday working life (including 4-way edging)

- Corrosion-resistant fixtures
- Use of high-quality and high-strength materials
- Versatile and practical accessories



Fiberglass

Ladders made of GFRP offer the perfect properties for special challenges. [Find out](#) what makes GFRP such a special material, how we use it for ladders and where these ladders are used.



Note: Working heights

- National regulations (e.g. TRBS 2121 Part 2 in Germany) must be complied with with regard to the maximum working height when using the ladder as a workstation.
- Information on [TRBS 2121 Part 2](#) has been summarised on our Service page
- Read our [tips and tricks](#) on how to calculate [working height](#)



Corporate certifications

Standards for quality and sustainability

