



Order no.: 012012

Step window cleaner's ladder middle section with clip-step R13



Number of steps

5

Specification

Ladder length 1.55 m	Number of steps/rungs 5 steps	Step depth 80 mm	Step/Rung distance 263 mm	Upper outer width 364 mm
Lower outer width 448 mm	Inclination 70 °	Depth of side-rails 73 mm	Width of side-rails 25 mm	Max. load capacity 120 kg
Design type To lean against	BG BAU supported Yes	Weight 5.604 kg	Transport dimensions 1643 x 460 x 95 mm, 5.604 kg	Business division MUNK Günzburger Steigtechnik
Article no. 012012	Price € 320.00			

Facts

- Step window cleaner's ladder made of aluminium
- Stable rectangular tube side-rails
- Grooved steps with a depth of 80 mm
- clip-step R13 step padding for certified non-slip protection
- 4-fold edged step-to-side-rail connection

- Secure push-fit connection with additional hook lock
- Upper ladder with castors and abrasion-resistant contact rubber pad with wedge cut-out
- Lower ladder with nivello® stabiliser for extra stability and safe ascent (enclosed separately)
- Depending on the selection, a maximum of four individual parts can be combined, as the standing height of 5.0 m must not be exceeded
- Step spacing: 263 mm
- Ladder inclination: 70°
- Maximum load: 120 kg

Scope of supply

- Ladder middle section: 1 x
- Instructions for use and operation: 1 x

Information on sustainability criteria

- Corporate certification: ISO 9001
- Corporate certification: EN 1090
- Corporate certification: EcoVadis
- RoHS
- REACH
- The MUNK Group complies with a Code of Conduct
- The Supply Chain Act does not apply due to our size
- The materials used are listed in the technical specification
- Resource-saving production: own photovoltaic systems
- Energy-efficient consumption during production: LED lighting
- Repairability, durability and quality: 15-year warranty on series products made in Germany
- Recyclability: Our products are mostly made of aluminium, steel or wood and can be fed directly into the recycling process.
- Socially acceptable working conditions in production: fair wages, gender equality
- Economical and recyclable packaging: no use of polystyrene, predominantly use of wood and cardboard, small amounts of plastic
- No health hazards for the users

More product pictures



Added value

Industrial grade

Stable and robust for tough everyday working life (including 4-way edging)

- Corrosion-resistant fixtures
- Use of high-quality and high-strength materials
- Versatile and practical accessories



Sponsored by BG BAU


Specification subject to conditions; for the latest information please visit the BG BAU website (statutory accident insurance company for the construction and construction related services in Germany). Since 2014, the BG BAU has been promoting the purchase of platform ladders, step stools and ladder accessories with single-sided and double-sided access. All members of the BG BAU profit from this. This aims to prevent work accidents on building sites and improve ergonomic working practices. For more information by BG BAU, please visit: www.bgbau.de/praemien



clip-step R 13 step padding

Certified non-slip protection for step ladders

- Fulfills the requirements of the highest possible non-slip class R 13 thanks to aluminium oxide particles
- Improves work safety in wet and oil-contaminated environments
- Applied up to the maximum accessible step as a visual check
- Retrofittable, available as a spare part and also in yellow in selected lengths (RAL 1021)



EuroTest Prize 2019

for outstanding achievements in occupational health and safety



Accessories / Spare parts




Order no.: 012032

Retrofit kit clip-step
R13 for step window
cleaner's ladder middle
section




Order no.: 019219

nivello® foot plate,
electrically conductive



Order no.: 019213

nivello® foot plate for
gratings 126 x 89 mm




Order no.: 019211

nivello® foot plate for
smooth surfaces



Order no.: 019209

nivello® foot plate,
standard

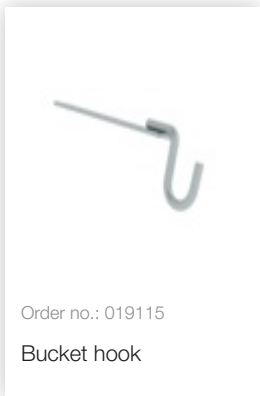

Order no.: 019115

Bucket hook

Corporate certifications

on sustainability criteria

